



TITLE		PART NUMBER	
BRAKE LOCK		02-620-172	
REV.	NPR OR ECO NO.	DATE	
F	ECO		

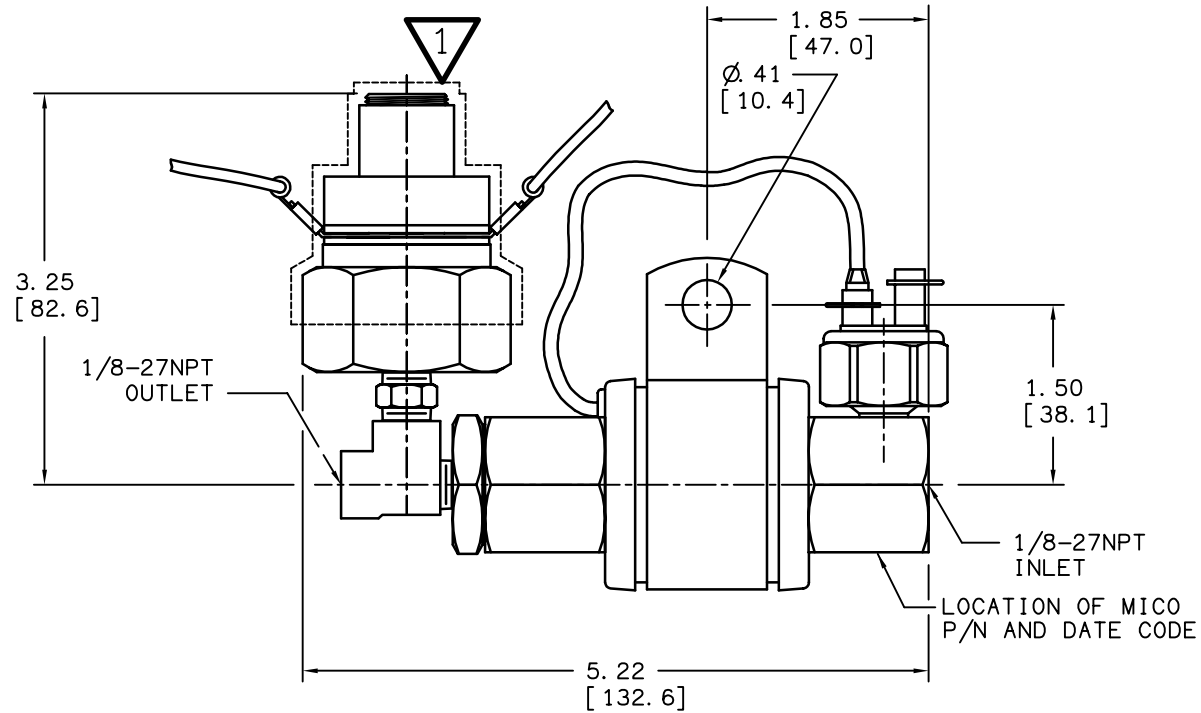

NOTES:

- FOR USE WITH MINERAL BASE HYDRAULIC OIL ONLY.
- DIMENSIONS MAY VARY SLIGHTLY BETWEEN UNITS AND ARE TO BE USED TO BE USED FOR REFERENCE PURPOSES ONLY.
-  THE PRESSURE SWITCH IS SURROUNDED BY A SILICONE SEALANT IN THIS APPROXIMATE AREA.
- FOR USE IN 12-VOLT APPLICATION.

PERFORMANCE CHARACTERISTICS:

- PRESSURE SWITCH SPECIFICATIONS:
 - CONTACT ARRANGEMENT: NORMALLY CLOSED.
 - RATING: 30 AMP, 6 V. D. C.
20 AMP, 12 V. D. C.
 - PRESSURE SETTING: CONTACTS OPEN BY 700 PSI INCREASING.
RELEASE: -10% OF SETTING.
- PRESSURE SWITCH P/N 20-580-072.

INCH
[millimeter]

COMPONENT AND SYSTEM RECOMMENDATIONS MADE BY MICO, INC. ARE BASED ON INFORMATION SUPPLIED BY POTENTIAL USER AND/OR SYSTEM DESIGNER. THE POTENTIAL USER AND/OR DESIGNER MUST MAKE FINAL ACCEPTANCE AND APPROVAL OF COMPONENTS AND SYSTEM AFTER TESTING PERFORMANCE ON AN ACTUAL APPLICATION FOR WHICH SYSTEM WAS DESIGNED.



North Mankato, Minnesota U. S. A.

MICO, INC. CLAIMS PROPRIETARY RIGHTS TO THE MATERIAL DISCLOSED IN THIS DOCUMENT. THIS DOCUMENT IS PROVIDED IN CONFIDENCE AND MAY NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICO, INC. COPYRIGHT MICO, INC. ALL RIGHTS RESERVED.

SCALE .625		PART NUMBER		REV. F
X NO. x		02-620-172		
DRAWN TLJ		CUSTOMER COPY		
REVISED				
DATE	CHECKED	APPROVED		
1/18/2000		ENG.		